

X38 Series – 38mm Optical Trackball, Panel Mount, USB & PS/2 Output



Figure 1: Cursor Controls X38 Trackerball

1. DESCRIPTION

Utilizing the latest and most advanced infrared optical tracking technology, the X38 Series optical Trackerball™ is an extremely high specification, contact-less device, ideal for the most demanding of cursor control applications.

The optical tracking engine provides accurate cursor motion at all speeds and on virtually any ball, combining the benefits of solid-state sensing (no moving parts except the ball) with the aesthetics, functionality and performance associated with the Cursor Controls product range.

The design incorporates a removable top ring as standard to allow for easy cleaning, decontamination, sterilisation and maintenance - ensuring continued optimum performance and operation under the harshest of conditions.

The X38 series trackballs are available with a variety of electrical outputs, tracking force options, and sealing capabilities up to IP68.

The trackball has been designed to be back of panel mounted as part of OEM keyboards and consoles.


2. FEATURES

- Solid state sensing technology – infrared optical tracking engine (Generation II)
- Sealing up to IP68
- Outputs: USB & PS2 (auto-select)
- Smooth operation in rugged environments
- Various top plate configurations
- Custom connector options available
- Various ball colours available
- VX3™ – integrated zoom feature for scroll wheel functionality

3. APPLICATIONS

- Medical systems
- Marine systems
- Custom keyboard applications
- Industrial consoles
- OEM custom solutions available

7. DIMENSION DRAWING

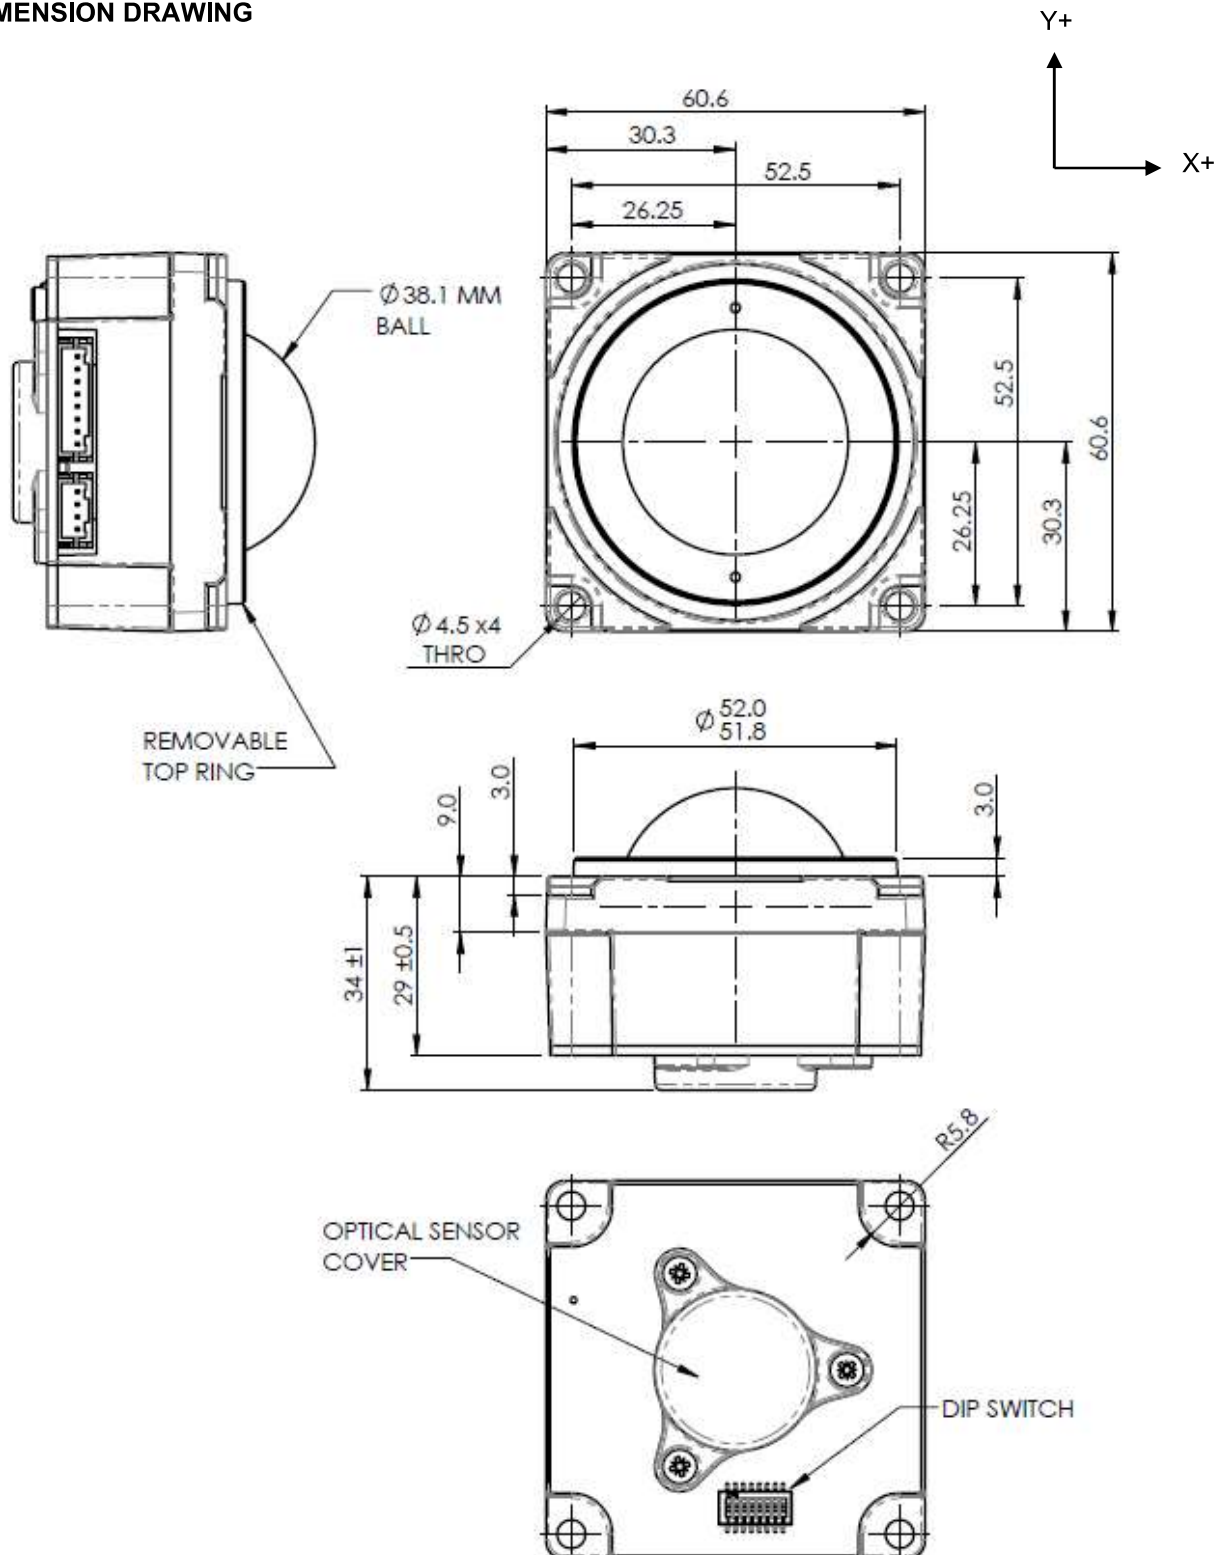

Dimensional drawing specifies factory default orientation.

All dimensions are in mm unless otherwise stated.

Tolerances +/- 0.25mm unless otherwise stated

Please note that an IGES model is available on request. Please contact your local sales office for more information.

8. PRODUCT ORDERING CODE SYSTEM

Please construct your standard product ordering code by selecting the numbers and letters to suit your specification:

X	38	-	7	6	0	2	X	X	-	G
Product Range X = X Series	Ball Size (Nominal mm)									
Sealing Capabilities* 7 = IP68										
Electrical Output* 6 = USB & PS2 (auto select)										
Integrated Switches 0 = No external Switches										
Mounting Option 2 = Mount to back of panel										
Top Plate & Body Style* 1 = Black top ring & body - damper ring, removable ring with dimples 3 = Black top ring & body - PTFE seal, removable ring with dimples B = Black top ring & body - PTFE seal, removable ring with ribs										
Ball Colour* D = Metallic grey 0 = Black										
Tracking Engine G = Infrared Optical Tracking Technology (Generation II)										

*For further options please contact your local sales representative

8.1 Ordering Example

X38-76021D-G: X38, IP68, USB & PS/2, no external switches integrated, mount to back of panel, black top ring & body - damper ring, metallic grey ball, infrared optical tracking technology (Generation II).

X38-760230-G: X38, IP68, USB & PS/2, no external switches integrated, mount to back of panel, black top ring & body – PTFE seal, black ball, infrared optical tracking technology (Generation II).

9. DOCUMENT HISTORY

Issue	Date	Author	Remarks
A	10.01.19	N.S	NP1189: Document released
B	11/04/22	C.E.	NP1354 – Type “B” body style added

Whilst the information provided herein is to the best of our knowledge true and accurate, it should be used for guidance only and may be subject to change. You are therefore advised to ensure all information provided herein is current and up to date and suitable for your application. Use of Cursor Controls Ltd products in life support systems is only permitted with prior written consent of the Company.

All information contained herein should be regarded as confidential and is supplied subject to Cursor Controls Ltd Terms and Conditions – a copy of which is available on request or can be found at www.cursorcontrols.com/terms-conditions